

Common Multi-Component Gases (Non-Reactive)

Product Code	Gases	Product Code	Gases
EX471	60 ppm CO/1.45% CH ₄ /15% O ₂ /N ₂	EX441	50 ppm CO/1.1% PROPANE/18.0% O ₂ /N ₂
EX481	100 ppm CO/2.5% CH ₄ /19% O ₂ /N ₂	EX892	50 ppm CO/2.5% CH ₄ /AIR
EX484	100 ppm CO/2.5% CH ₄ /20.9% O ₂ /N ₂		

Common Multi-Component Gases (Reactive)

Product Code	Gases	Product Code	Gases
EX491	10 ppm H ₂ S/300 ppm CO/1.45% CH ₄ /15% O ₂ /N ₂	EX895	25 ppm H ₂ S/50 ppm CO/2.5% CH ₄ /12% O ₂ /N ₂
EX486	20 ppm H ₂ S/60 ppm CO/1.45% CH ₄ /15% O ₂ /N ₂	EX483	25 ppm H ₂ S/100 ppm CO/.35% Pentane/19% O ₂ /N ₂
EX495	25 ppm H ₂ S/50 ppm CO/2.5% CH ₄ /19% O ₂ /N ₂	EX891	25 ppm H ₂ S/50 ppm CO/1.1% Propane/Air


Support Equipment



EXF-180 Fixed Flow Regulator

- Integral On/Off valve
- Sturdy, lightweight aluminum construction.
- Maximum Inlet Pressure: 3000 psig
- Inlet Fitting: CGA 180
- Outlet Fitting: 3/16" Hose Barb

Part No.	Flow Rate
82250250	.25 LPM
82250500	.5 LPM
82251000	1.0 LPM

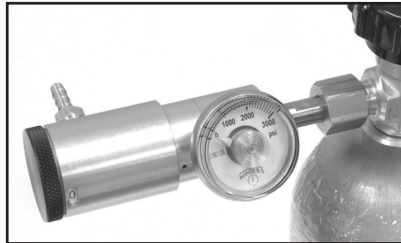

EXM-180 Multi Flow Regulator

- Multiple Flow Settings: OFF, .3, .5, 1.0, 1.5, 2.0, 2.5, 3.0, 5.0, 6.0, 7.0, 8.0 LPM
- Sturdy, lightweight aluminum construction.
- Maximum Inlet Pressure: 3000 psig
- Inlet Fitting: CGA 180
- Outlet Fitting: 3/16" Hose Barb

Part No. : 94201700



EXD-180 Demand Flow Regulator

- Designed for calibration of analyzers with sampling pumps.
- Gas flows when pump draws, gas flow stops when pump stops.
- Sturdy, lightweight aluminum construction.
- Maximum Inlet Pressure: 3000 psig
- Inlet Fitting: CGA 180
- Outlet Fitting: 3/16" Hose Barb

Part No. : 50422003

Special Applications